

# OptiTap® Test Jumpers 1 F, Single-mode (OS2), 2.9 mm, 3 m




**Part Number:**  
**434401E31AJ003M**

As an Industry leader in optical connectivity products, Corning designs and manufactures the OptiTap™ to SC APC Test Jumper with factory-terminated, environmentally sealed and hardened connectors to allow testing of OptiSheath® MultiPort Terminals and OptiSheath® UCAO Terminals .

## Features and Benefits

Enables direct connection to optical power meters for in-field testing

Environmentally sealed connector housing permits rapid connection to external flush-mounted bulkhead adapters on terminals or closures. Terminal or closure entry is not required for drop cable installation.

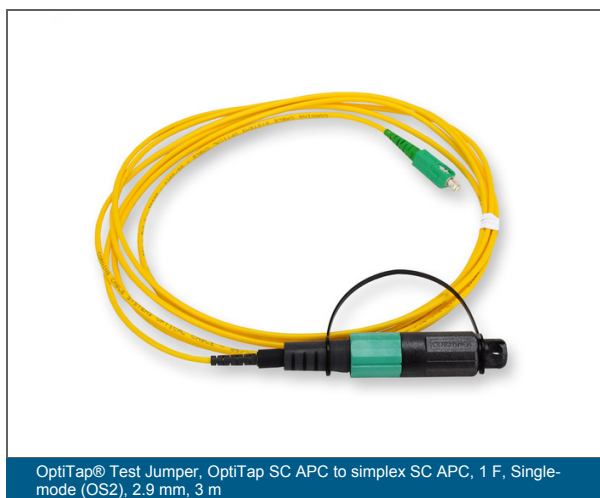

# OptiTap® Test Jumpers 1 F, Single-mode (OS2), 2.9 mm, 3 m



## Specifications

### General Specifications

Fiber Category	Single-mode (OS2)
Product Type	OptiTap®
Termination	Both ends
Application	Tight-Buffered

### Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

### Environmental Conditions

Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F )
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F )

### Design

Fiber Count	1
-------------	---

### Mechanical Specifications

Cold Mate/Demate	-40 °C (-40 °F)
Cable Length	3 m (9.84 ft)

### Ordering Information

Product Number	434401E31AJ003M
EAN Code	4056418201672
Units per Delivery	1/1

# OptiTap® Test Jumpers 1 F, Single-mode (OS2), 2.9 mm, 3 m

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)