



# LISCA LTE

## LiS-C9-11431X-11431X-XXXXX-52


Cable: Corrugated 1/2" HF (High Flex)

Connectors: 2x straight male 4.3-10-X (HEX. nut)

### Description

**LISCA LTE** Assembly consisting of corrugated 1/2" high-flex coaxial cable with connectors 2x straight 4.3-10(X) male for frequencies DC to 6 GHz. (LISCA = Low Loss Soldered Corrugated Cable Assemblies)

### Mechanical Diagram

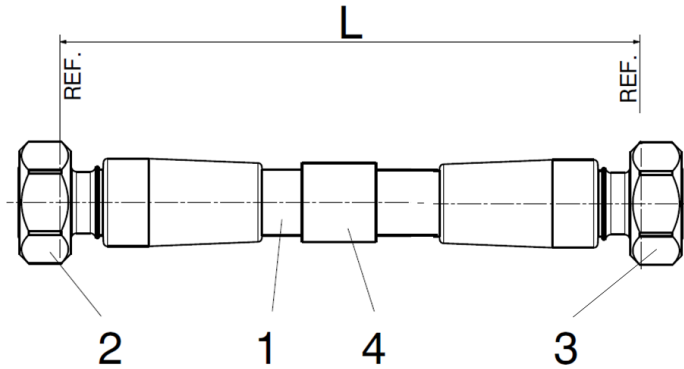

### List of Components

Pos.	Components	Description	Type
1	Cable type	Corrugated 1/2" High Flex (S) with PE jacket	SUCOFEED_1/2" HF or equivalent
2	Connector type	4310(X = Hex. nut) straight male	LIS11_4310-50-9-XSTD
3	Connector type	4310(X = Hex. nut) straight male	LIS11_4310-50-9-XSTD
4	Marking	See Marking and Packing section	

### Mechanical Data

Cable length	Length is measured from the outer conductor Ref. interfaces for straight connectors	for cable up to 2m: +/-10mm for cable up to 5m: +/-30mm for cable > 5m: +/- 1 % of Length
Coupling nut torque	4.3-10(X) male connector (recommended)	5 ... 8 Nm
Bending radius	Single // Repeated (20 times)	min. 25 mm // min. 50 mm
	<b>Cable bending <u>must</u> start after the moulded connector cable entry protection!</b>	
Hanger spacing	Recommended distance	0.8 m

### Electrical Data

Impedance		50 Ω		
Frequency	max. operating	6 GHz		
Return loss (typ.) 100% tested	<b>Length</b>	<b>0.5m to 4m</b>	<b>&gt;4m to 7m</b>	<b>&gt;7m to 10m</b>
	DC - 1.00 GHz	32 dB	31 dB	30 dB
	1.70 - 2.20 GHz	30 dB	29 dB	28 dB
	2.20 - 2.70 GHz	28 dB	27 dB	26 dB
	3.40 - 3.80 GHz	25 dB	24 dB	23 dB
Intermodulation	IM3 / 100% tested	-117 dBm @ 2x20W (160 dBc) // typ. -120 dBm @ 2x20W (-163 dBc)		
RF Power	At 40°C / sea level	1.0 GHz: ≥ 780 W / 2.2 GHz: ≥ 520 W 2.7 GHz: ≥ 470 W / 3.8 GHz: ≥ 390 W		
Attenuation (typ.)	At 20°C / 100% tested	DC .. 1.0 GHz	≤ 0.11 dB/m (cable) + 0.020 dB (connector)	
		up to 2.2 GHz	≤ 0.17 dB/m (cable) + 0.025 dB (connector)	
		up to 2.7 GHz	≤ 0.19 dB/m (cable) + 0.030 dB (connector)	
		up to 3.8 GHz	≤ 0.23 dB/m (cable) + 0.040 dB (connector)	



**LISCA LTE**

**LIS-C9-11431X-11431X-XXXXX-52**

Cable: Corrugated 1/2" HF (High Flex)

Connectors: 2x straight male 4.3-10-X (HEX. nut)

**Environmental Data**

Temperature range	Operating // Installation // Storage	-40° C to +85° C // -25° C to +60° C // -70° C to +85° C
Waterproof rate	0.1 bar, 24 h, 20°C	IP68
RoHS (2011/65/EU)	Lead free solder	Compliant

**Requirement of included components**

**4.3-10(X) straight male connector (HEX. nut)**

Interface	Meet std. IEC 61169-54		
Coupling nut	HEX. 22 mm		
Material	Body, nut and centre contact: Brass	Insulator: PTFE	
Plating	Body: Tremetal/Silver	Centre contact: Silver	Nut: Nickel/Tremetal

**Corrugated 1/2" HF (High Flexible) cable**

Jacket	PE, black	max. Φ 13.6 mm
	Free of halogen	IEC 60754-1
	UV resistance	DIN EN ISO 4892
Performance	Relative propagation velocity	82 %

**Marking and Packing**

Marking	Positioning	If cable ≤ 1m: cable centre / If cable > 1m: 30 cm from moulding of connector (No. 2)
	Printing	Manufacturer / Part No / Jumper Serial No.
Packing	1 Assembly in a plastic bag, with protection on connector interface	


**Ordering Information**

LIS-C9-11431X-11431X-XXXXX-52

**XXXXX = Length of assembly in millimetres**

Example: LIS-C9-11431X-11431X-02000-52

Jumper cable made with 2x straight male 4310(X) connectors using 1/2" high flex corrugated cable with length 2000 millimetres (6.5 ft).

<p><b>WAIVER!</b> It is exclusively in written agreements that we provide our customer with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.</p>		 <b>HUBER+SUHNER</b>  RF Division www.hubersuhner.com
<p>HUBER+SUHNER is certified according to ISO 9001 and ISO 14001</p>		
<p>Issued: 15/05/2021</p>	<p>Revision: D</p>	
<p><u>uncontrolled copy</u></p>		