


PLC SPLITTER SINGLEMODE 1XN Ø 1.6/2.0mm



The Telenco® singlemode PLC splitters are the main components of FTTx/PON (Passive Optical Network) and CATV (Community Antenna Television). They are easy to install on splice trays, in optical patch panels or inside splice protection boxes.

They are used to divide an optical signal at the splitter's input towards several fibres, at the splitter's output.

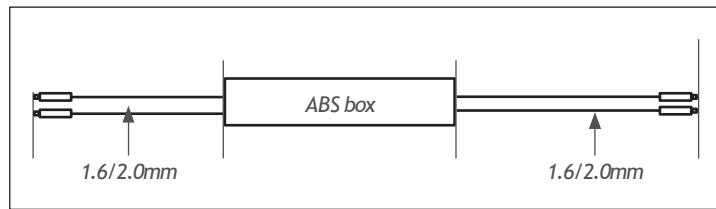

FEATURES & BENEFITS

- Compact and rugged construction
- Excellent optical performances
- Wide range offering multiple solutions
- 100% configurable inputs and outputs

AVAILABLE CONFIGURATIONS

PARAMETERS	CONFIGURATIONS
Available connectors	Input: SC/APC ; SC/UPC ; LC/APC ; LC/UPC Output: SC/APC ; SC/UPC ; LC/APC ; LC/UPC
Colours	Input: configurable (standard : orange) Output: configurable (standard : yellow)
Fiber type	G.657A2
Length	Input and output: 0.5 to 3 m
Diameter	Ø 1.6 mm or Ø 2.0 mm
Splitting ratio	1x2 ; 1x4 ; 1x8 ; 1x16 ; 1x32 ; 1x64 ; 1x128

TECHNICAL SPECIFICATION

PARAMETERS	SPECIFICATIONS
IEC-61300	100% compliant
Box material	ABS

TECHNICAL SPECIFICATION

PARAMETERS	SPECIFICATIONS						
Splitting ratio	1x2	1x4	1x8	1x16	1x32	1x64	1x128
Box dimensions L x W x H (mm)	100 x 80 x 10						100 x 80 x 20
Operating wavelength	1260 nm to 1660 nm						
Insertion Loss IL (dB)	≤ 3.8	≤ 7.1	≤ 10.4	≤ 13.7	≤ 17.0	≤ 20.3	≤ 22.7
Return Loss RL (dB)	≥ 55						
Polarization Dependent Loss PDL (dB)	≤ 0.2	≤ 0.2	≤ 0.3	≤ 0.3	≤ 0.4	≤ 0.4	≤ 0.5
Uniformity (dB)	≤ 0.5	≤ 0.9	≤ 1.3	≤ 1.7	≤ 2.1	≤ 2.5	≤ 2.5
Directivity (dB)	≥ 55						
Additional Insertion Loss per connector IL	Grade B ≤ 0.12 dB on average and ≤ 0.25 dB max for 97% of connections						
Connector return Loss RL	≥ 60 dB (APC) and ≥ 50 dB (UPC)						
Temperature	Operation, transport and storage: -40 °C / +85 °C						